




Moteurs semi-rapides





Energy Solutions Provider

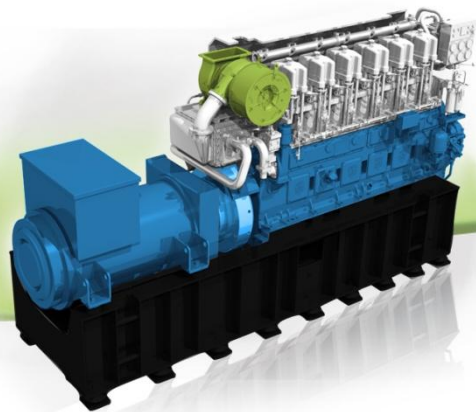

	A1200-750L	A1600-750L	A2500-750L	A3300-750L	A1500-1000L	A2000-1000L	A3000-1000L	A4200-1000L
--	------------	------------	------------	------------	-------------	-------------	-------------	-------------

Régime	750 tr/min				1000 tr/min			
Moteur	6DZC-750-179	8DZC-750-179	12DZC-750-179	16DZC-750-179	6DZC-1000-166	8DZC-1000-166	12DZC-1000-166	16DZC-1000-166
Alternateur	LSA53M85	LSA54VS60	LSA54VL100	LSA56XL85	LSA52.2VL85	LSA53M85	LSA54VL100	LSA56L70
Tension	400 V	400 V	400 V	400 V	400 V	400 V	400 V	6600 V
Puissance électrique nominale nette (auxiliaires déduits)	981 kWe	1303 kWe	1995 kWe	2655 kWe	1229 kWe	1651 kWe	2506 kWe	3350 kWe
Puissance apparente équivalente à cos phi 0,8	1226 kVA	1629 kVA	2493 kVA	3319 kVA	1537 kVA	2064 kVA	3133 kVA	4187 kVA

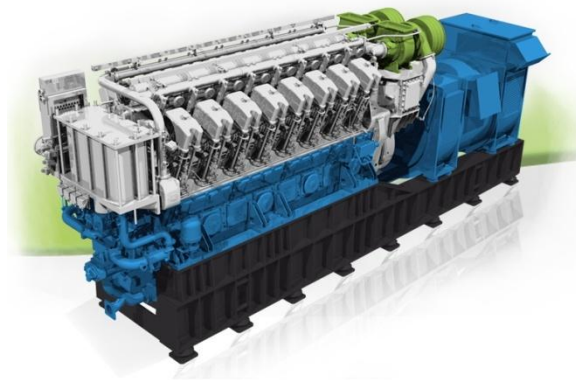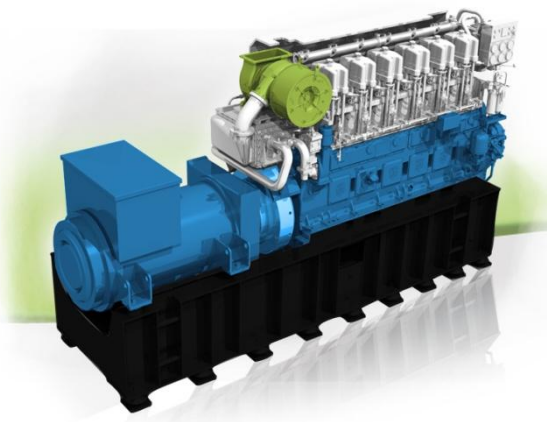

	A1200U-720L	A1600U-720L	A2400U-720L	A3200U-720L	A1400U-900L	A1900U-900L	A2800U-900L	A3800U-900L
Régime	720 tr/min				900 tr/min			
Moteur	6DZC-720-181	8DZC-720-181	12DZC-720-181	16DZC-720-181	6DZC-900-166	8DZC-900-166	12DZC-900-166	16DZC-900-166
Alternateur	LSA53M75	LSA54VS65	LSA56VL60	LSA56ZL100	LSA53VS65	LSA53L95	LSA54VL100	LSA56L75
Tension	480 V	480 V	480 V	480 V	480 V	480 V	480 V	6600 V
Puissance électrique nominale nette (auxiliaires déduits)	943 kWe	1263 kWe	1909 kWe	2576 kWe	1099 kWe	1481 kWe	2245 kWe	2993 kWe
Puissance apparente équivalente à cos phi 0,8	1179 kVA	1579 kVA	2386 kVA	3220 kVA	1373 kVA	1851 kVA	2807 kVA	3741 kVA